



## Coaxial Fixed Attenuator

## RFH06XXNA300-D

DC-6 GHz, 6-60 dB, 300 Watts, N, Unidirectional

Rev 3

### Electrical

<b>Impedance</b>	50 ohm						
<b>Frequency Range</b>	DC-6 GHz						
<b>VSWR</b>	1.25 max						
<b>Input Avg Power</b>	300W@ 25°C ambient, derating linearly to 30W at 100°C						
<b>Peak Power</b>	2kW (5 micro-sec pulse width, 7.5% duty cycle)						
<b>Direction</b>	Unidirectional, N female input, N female output (other configurations available)						

<b>Attenuation(dB)</b>	6	10	10	20	30	40,50	60
<b>Accuracy(dB)</b>	-1, +2	±1.2	±1.5	±1.5	±0.9	±0.9	±0.9


### Mechanical

<b>Connector Body</b>	Ternary alloy plated brass
<b>Heat Sink</b>	Black anodized aluminum
<b>Center Contact</b>	Gold plated beryllium copper/brass
<b>Net Weight</b>	Approx 4000 g

### Environmental

<b>Operating Temperature</b>	-55°C to 100°C
<b>Storage Temperature</b>	-55°C to 125°C
<b>RoHS</b>	Compliant
<b>Temperature Coefficient</b>	<0.0004 dB/dB/°C

### Dimensions(mm)

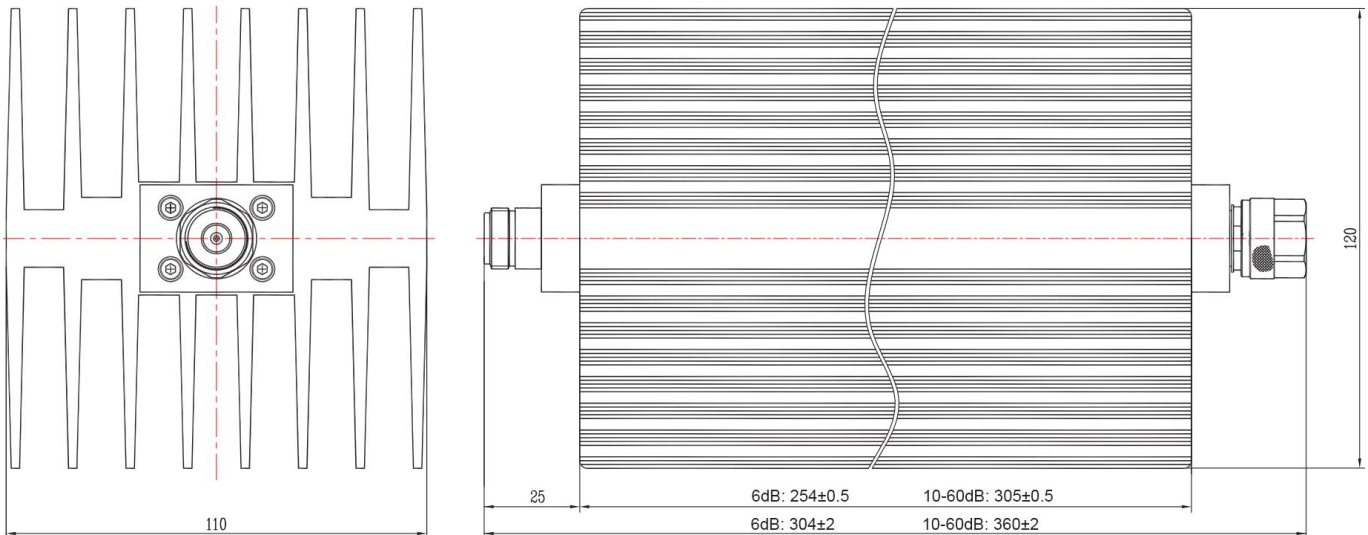

### Notes

1. Always pay attention to the direction of attenuators.
2. To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
3. Customized dB values, outlines and optimal accuracy/VSWR available.

### Model Description

#### RFH06XXNA300-D

1. XX for dB value: 06=6dB, 30=30dB
2. Code for connector configuration:  
 A=female for two ends; B=male for two ends  
 C=female for input and male for output;  
 D=male for input and female for output.