




**Electrical & Environmental**

|                        |  |
|------------------------|--|
| Impedance              | 50 ohm                                       |
| Number of Output Ports | 2 Way  |
| Frequency Range        | 2-18 GHz                                     |
| Insertion Loss         | ≤ 1.5dB (Excluding theoretical loss 3.0dB)   |
| Input VSWR             | 1.5 max                                      |
| Output VSWR            | 1.5 max                                      |
| Isolation              | 17dB min                                     |
| Amplitude Balance      | ≤ ±0.3dB                                     |
| Phase Balance          | ≤ ±4°  |
| Average Power Rating   | 20 Watts (As Divider), 1 Watts (As Combiner) |
| Operating Temperature  | -45°C ~ +85°C                                |

**Mechanical**

|                         |                  |
|-------------------------|------------------|
| Input/Output Connectors | N Female         |
| Housing Finishing       | Painted Aluminum |
| Outline Dimensions      | 44*52*20 (mm)    |

**Dimensions**(Unit: mm/[inch], Tolerance: ±0.3mm)

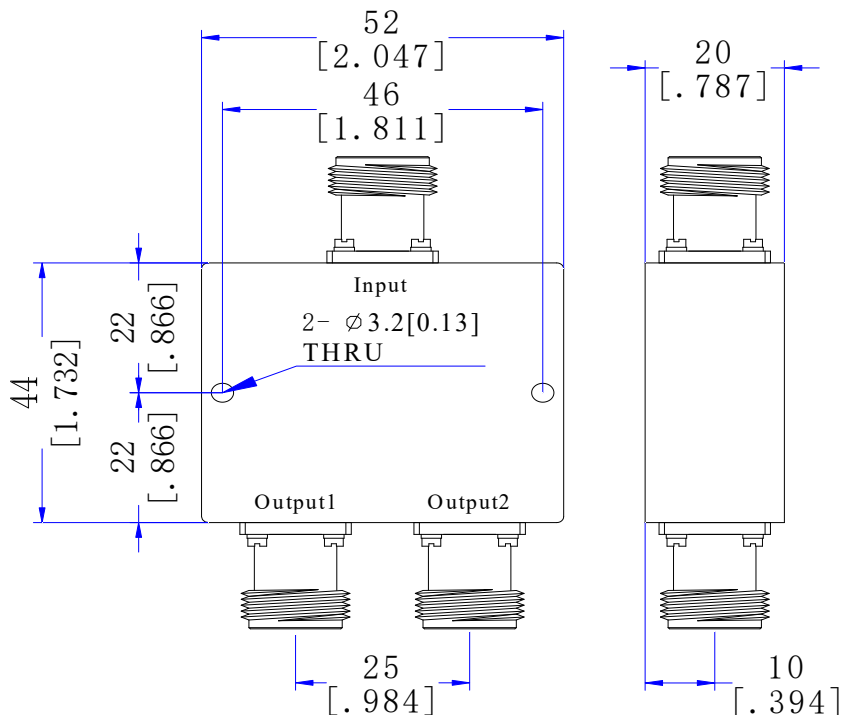



### Typical Test Data

