



## Power Divider

## PDM-0618-S16

16 Way, 6-18 GHz, SMA, 20 Watts

Rev 2


### Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	16 Way
Frequency Range	6-18 GHz
Insertion Loss	≤ 1.8dB (Excluding theoretical loss 12.0dB)
Input VSWR	1.6 max
Output VSWR	1.5 max
Isolation	17dB min
Amplitude Balance	≤ ±0.6dB
Phase Balance	≤ ±6°
Average Power Rating	20 Watts (As Divider), 1 Watts (As Combiner)
Operating Temperature	-45°C ~ +85°C

### Mechanical

Input/Output Connectors	SMA Female
Housing Finishing	Painted Aluminum
Outline Dimensions	60*212*10 (mm)
Weight	Approx 390g

### Dimensions (Unit: mm/[inch], Tolerance: ±0.3mm)

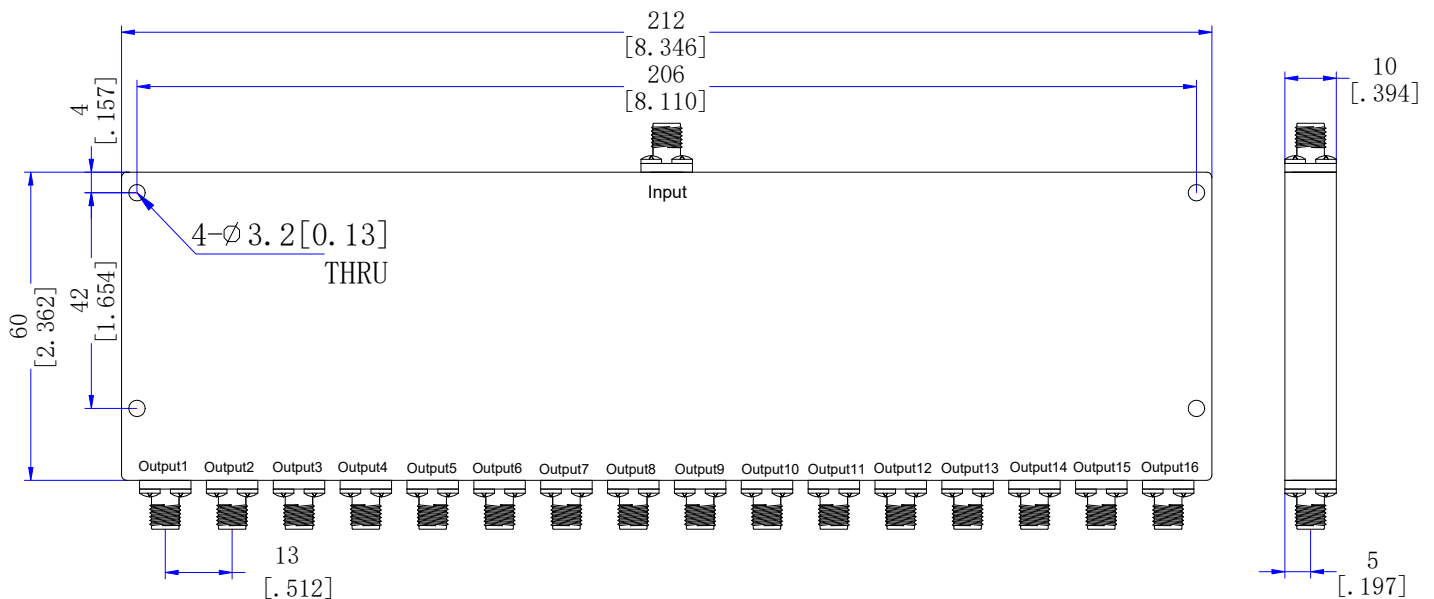



### Typical Test Data

