

PDR-06-S4

DC-6GHz, 4 Way SMA Resistive Power Divider



Rev 1


Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	4 Way
Frequency Range	DC-6 GHz
Insertion Loss	12 ± 1.2 dB (Including theoretical loss 12dB)
VSWR	≤ 1.25
Input Power	1 Watts max
Operating Temperature	-40 °C ~ +85 °C

Mechanical

Input/Output Connectors	SMA Female Body: Brass or stainless steel, Center contact: Gold plated BeCu
Housing Finishing	Aluminum alloy housing, with electric conductive oxidation
Weight	30g

Dimensions (Unit: mm/[inch], Tolerance: ±0.3mm)

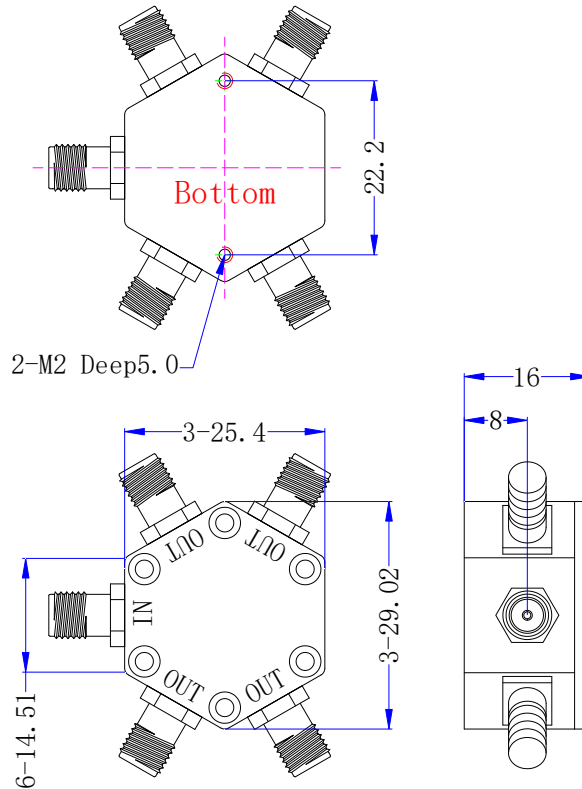



Typical Test Data

