




**Electrical & Environmental**

Impedance	50 ohm
Number of Output Ports	8 Way
Frequency Range	DC-6 GHz
Insertion Loss	18 ± 2.0 dB (Including theoretical loss 18dB)
VSWR	≤ 1.3
Input Power	1 Watts max
Operating Temperature	-40 °C ~ +85 °C

**Mechanical**

Input/Output Connectors	SMA Female Body: Brass or stainless steel, Center contact: Gold plated BeCu
Housing Finishing	Aluminum alloy housing, with electric conductive oxidation
Weight	60g

**Dimensions**(Unit: mm/[inch], Tolerance: ±0.3mm)

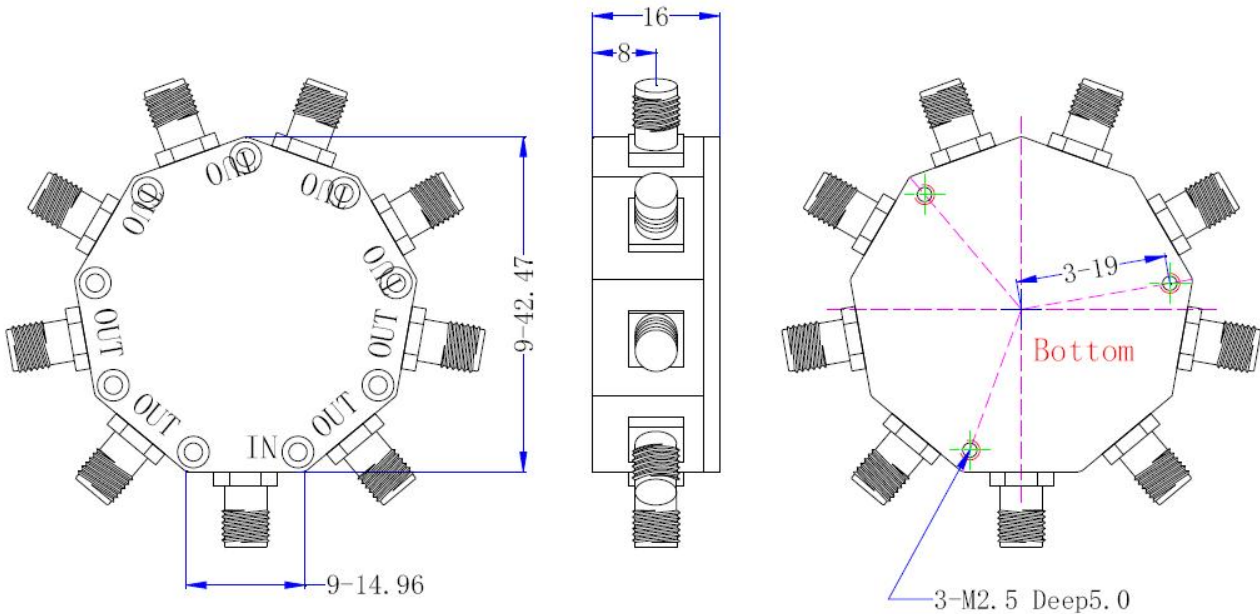



Typical Test Data

