

Coaxial Fixed Attenuator

RFH18XXND200-D



DC-18 GHz, 1-60 dB, 200 Watts, N, Unidirectional

Rev 4

Electrical

Impedance	50 ohm						
Frequency Range	DC-18 GHz						
VSWR	1.45 max						
Input Avg Power	200W@ 25°C ambient, derating linearly to 20W at 100°C						
Peak Power	1kW (5 micro-sec pulse width, 10% duty cycle)						
Direction	Unidirectional, N male input, N female output (other configurations available)						
Attenuation(dB)	1	3	6-10	20	30	40	50,60
Accuracy(dB)	+1.5, -0.7	+5, -1.0	±2.5	±2.0	±1.5	±1.3	±1.4


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	Approx 3000 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

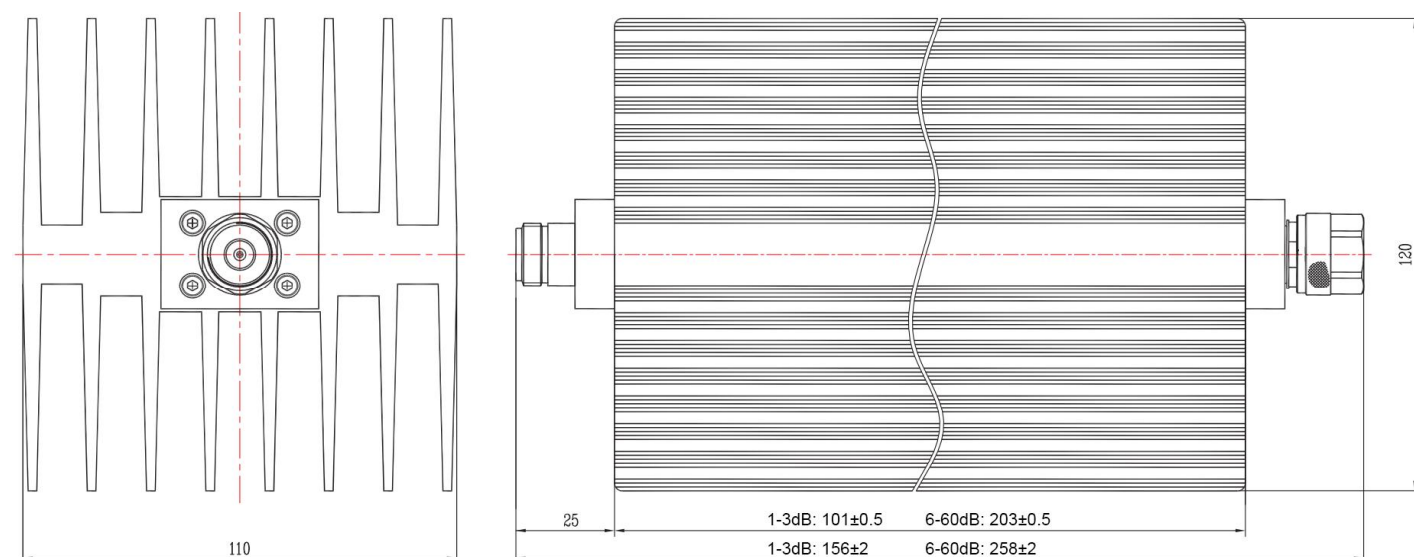

Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH18XXND200-D

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for input and male for output;
D=male for input and female for output.