



Electrical

| | | | | | |
|------------------------|--|--|--|--|--|
| Impedance | 50 ohm | | | | |
| Frequency Range | DC-18 GHz | | | | |
| VSWR | 1.45 max | | | | |
| Input Avg Power | 350W@ 25°C ambient, derating linearly to 35W at 100°C | | | | |
| Peak Power | 1kW (5 micro-sec pulse width, 10% duty cycle) | | | | |
| Direction | Unidirectional, N male input, N female output (other configurations available) | | | | |

| | | | | | |
|------------------------|------------|------|------|------|-------|
| Attenuation(dB) | 10 | 20 | 30 | 40 | 50,60 |
| Accuracy(dB) | +12.0/-1.0 | ±2.0 | ±1.5 | ±1.5 | ±1.5 |


Mechanical

| | |
|-----------------------|------------------------------------|
| Connector Body | Passivated stainless steel |
| Heat Sink | Black anodized aluminum |
| Center Contact | Gold plated beryllium copper/brass |
| Net Weight | Approx 5900 g |

Environmental

| | |
|--------------------------------|------------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 125°C |
| RoHS | Compliant |
| Temperature Coefficient | <0.0004 dB/dB/°C |

Dimensions(mm)

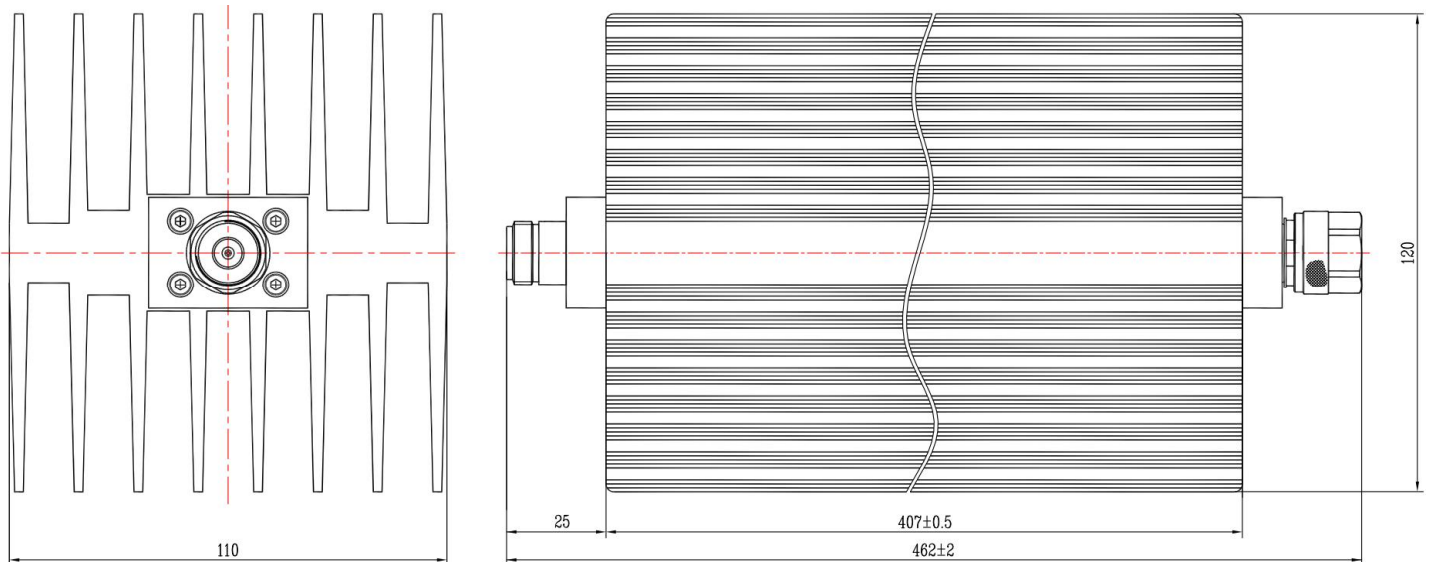

Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH18XXND350-D

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for input and male for output;
D=male for input and female for output.