



Electrical

Impedance	50 ohm			
Frequency Range	DC-40 GHz			
VSWR	1.38 max			
Input Avg Power	40W@ 25°C ambient, derating linearly to 4W at 100°C			
Peak Power	200W (5 micro-sec pulse width, 9% duty cycle)			
Direction	Unidirectional, 2.92mm male input, 2.92mm female output (other configurations available)			

Attenuation(dB)	10	20	30	40
Accuracy(dB)	-2.2/+3.0	-1.8/+2.2	-1.8/+2.0	-1.8/+2.0


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	1.27um Gold plated BeCu
Net Weight	Approx 160 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

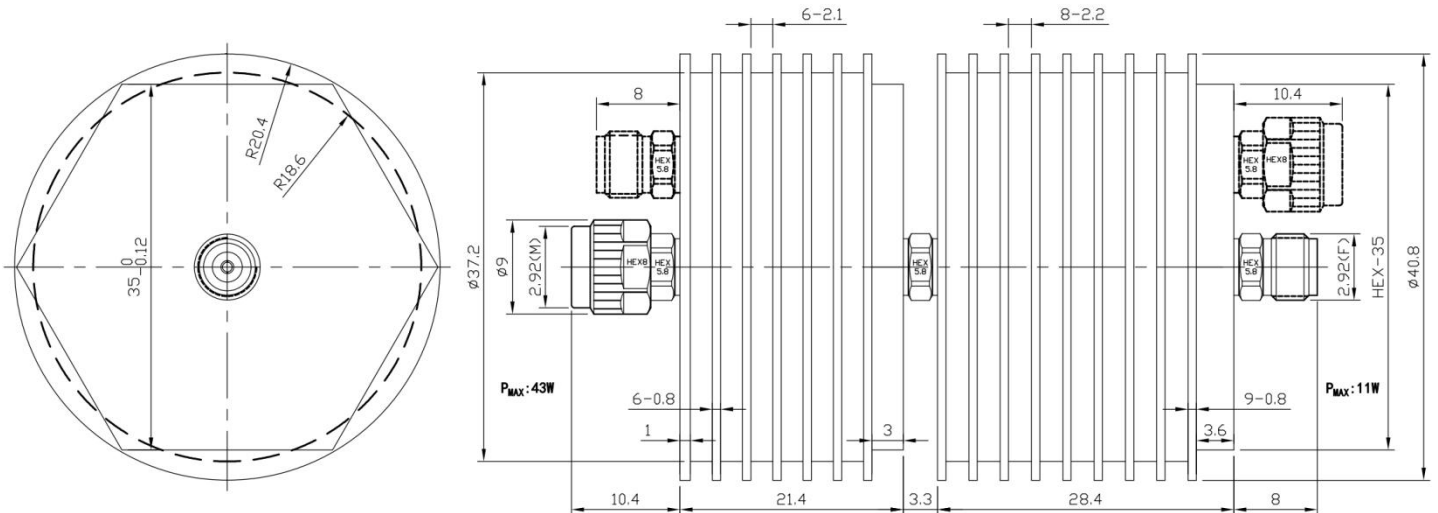

Notes


1. Always pay attention to the direction of attenuators.
2. To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
3. Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description


RFH40XX292D40

1. XX for dB value: 06=6dB, 30=30dB
2. Code for connector configuration:
 A=female for two ends; B=male for two ends
 C=female for input and male for output;
 D=male for input and female for output.


10dB

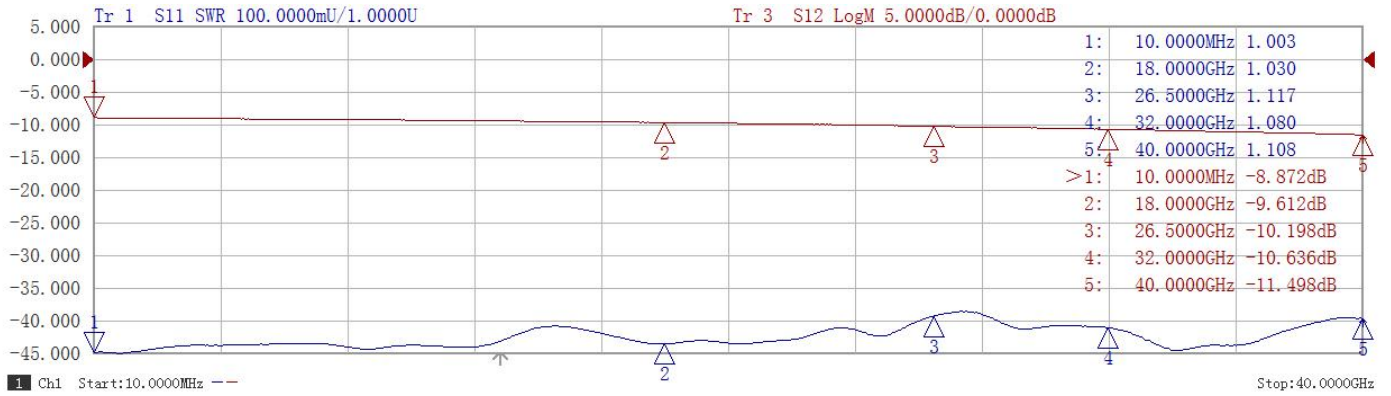

20dB

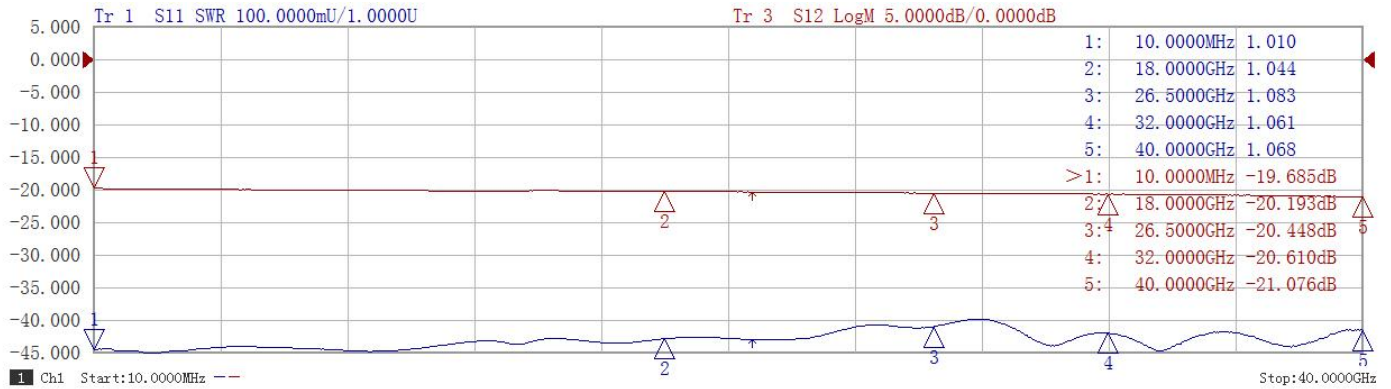

30dB

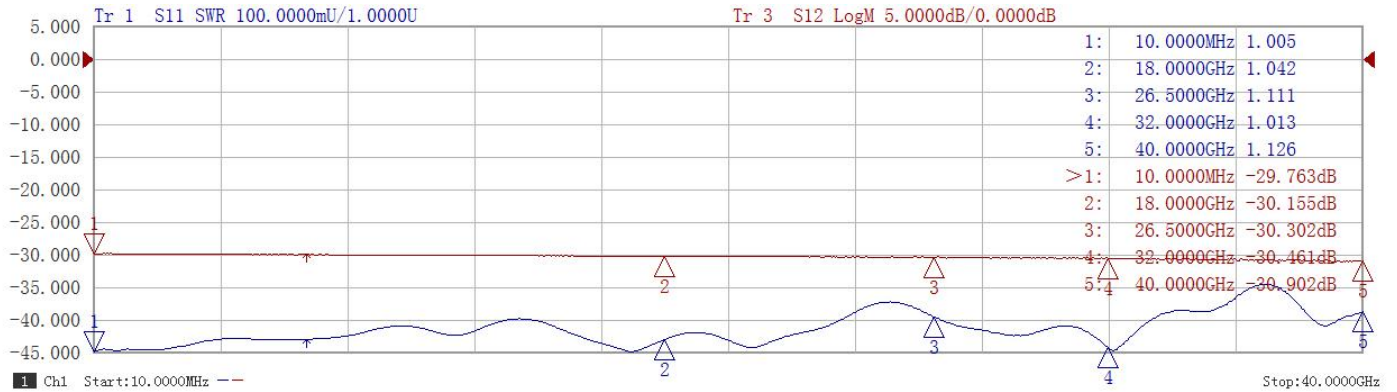

40dB

