



Electrical

Impedance	50 ohm					
Frequency Range	DC-12.4 GHz					
VSWR	1.3 max					
Input Avg Power	5W@ 25°C ambient, derating linearly to 0.5W at 100°C					
Peak Power	500W (5 micro-sec pulse width, 0.5% duty cycle)					
Direction	Bidirectional, N female to N male (other configurations available)					

Attenuation(dB)	1-10	20	30	40	50	60
Accuracy(dB)	±0.6	±0.7	±0.8	±0.9	±1.0	±1.2


Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	N/A
Center Contact	Gold plated beryllium copper/brass
Net Weight	Approx 70 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

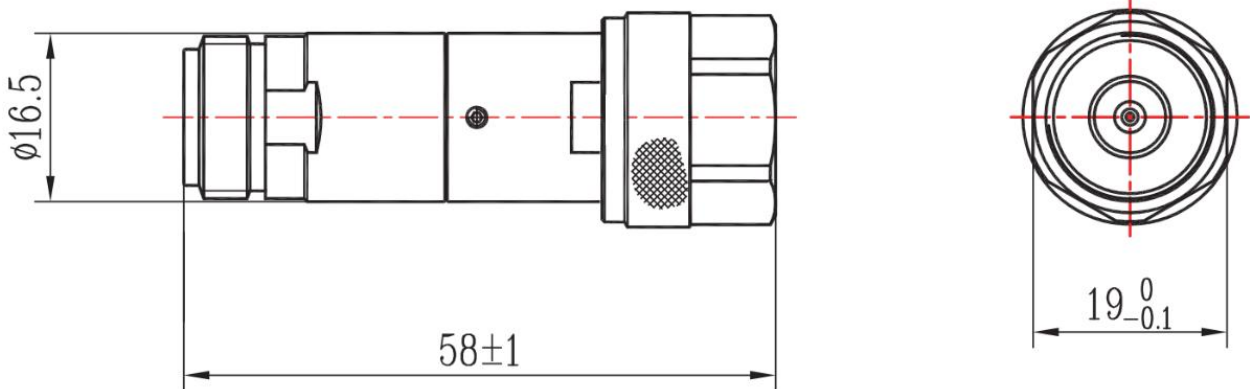

Notes

1. Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFHB12XXNC5

1. XX for dB value: 06=6dB, 30=30dB

2. Code for connector configuration:

A=female for two ends; B=male for two ends

C=female for one end and male for the other.