



Coaxial RF Termination

RFT022000D2

DC-2 GHz, DIN 7/16 Male, 2000 Watts, Fan-cooled

Rev 2

Electrical

Impedance	50 ohm
Frequency Range	DC-2 GHz
VSWR	1.2 max
Input Avg Power	2000W@ 25°C ambient, derating linearly to 150W at 100°C
Peak Power	5kW (5 micro-sec pulse width, 10% duty cycle)


Mechanical

Connector Body	Brass
Center Contact	Gold plated brass
Heat Sink	Black anodized aluminum
Net Weight	Approx 39kg

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

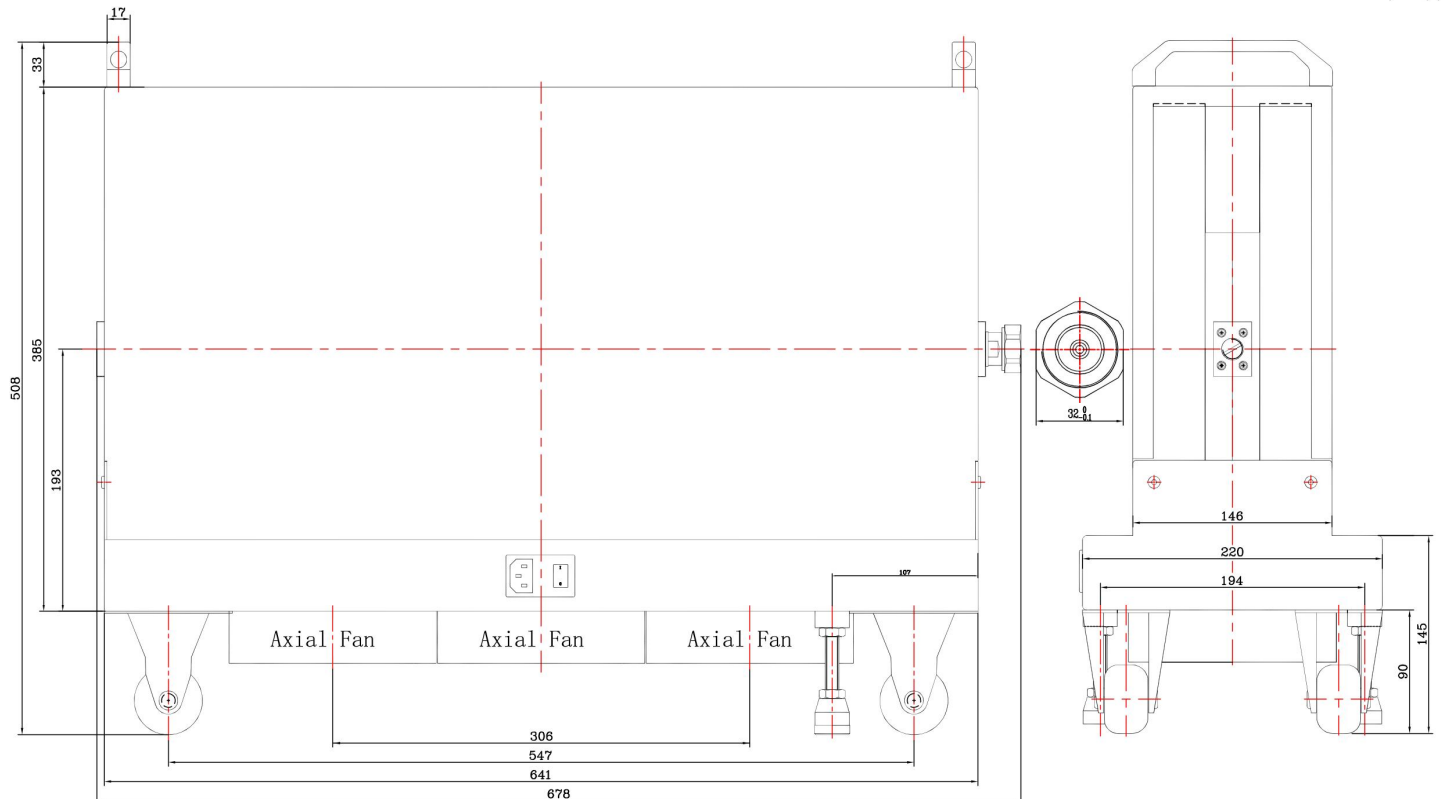

Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.