



Coaxial RF Termination

RFT041500D2

DC-4 GHz, DIN 7/16 Male, 1500 Watts, Fan-cooled

Rev 1

Electrical


Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.35 max
Input Avg Power	1500W@ 25°C ambient, derating linearly to 150W at 100°C
Peak Power	5kW (5 micro-sec pulse width, 10% duty cycle)

Mechanical

Environmental

Connector Body	Brass	Operating Temp	-55°C to 100°C
Center Contact	Gold plated brass	Storage Temp	-55°C to 125°C
Heat Sink	Black anodized aluminum	RoHS	Compliant
Net Weight	Approx 38kg		

Dimensions(mm)

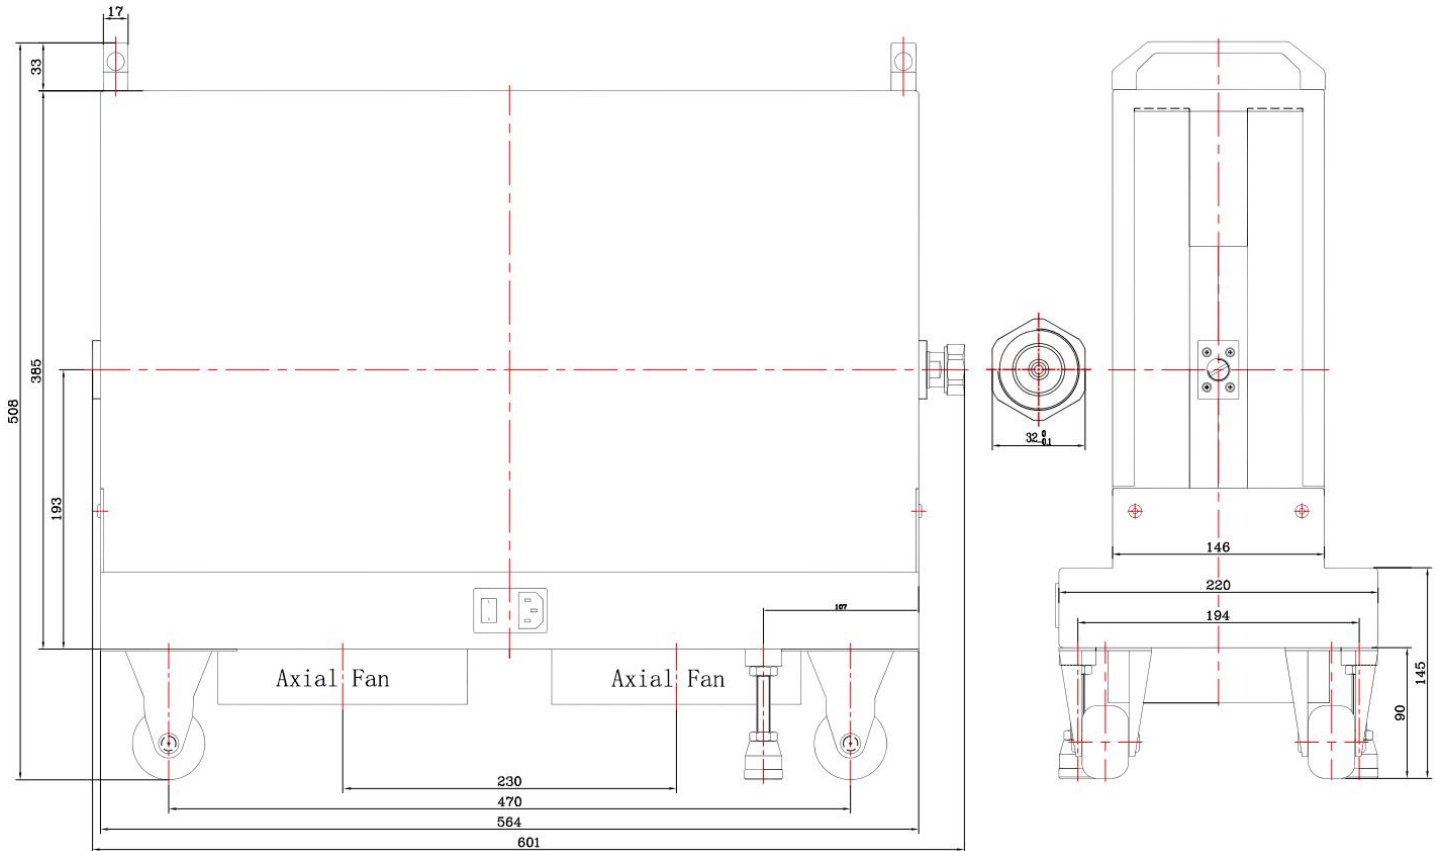

Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.