




Electrical

Frequency Range	9.84-15.0 GHz
VSWR	1.2 max
Attenuation	40 ± 1.2 dB
Input Avg Power	250 Watts
Peak Power	2.5 kWatts
Operating Temperature	-40°C~+85°C

Mechanical

Waveguide Size	WR75(R120)
Flange Type(Input&Output)	IEC: UBR120
Material	Aluminum
Internal Finish	Conductive oxidation
External Finish	High temp black painted
Net Weight	Approx 1300g

Dimensions(mm)

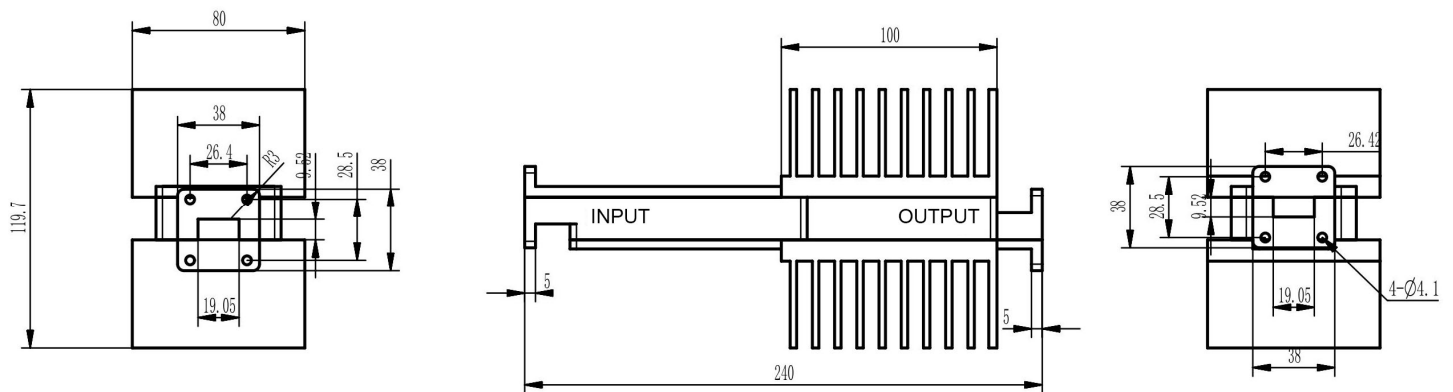



Typical Test Data

