



## Waveguide Termination

**WT284A500**

**WR284, 2.60-3.95 GHz, 500 Watts, Rectangular Cover Flange**

Rev 1


### Electrical

Frequency Range	2.60-3.95 GHz
VSWR	1.2 max
Input Avg Power	500 Watts @ 25°C
Operating Temperature	-40°C~+70°C

### Mechanical

Waveguide Size	WR284(R32)
Flange Type	IEC: UDR32
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted
Net Weight	Approx 1850g

### Dimensions(mm)

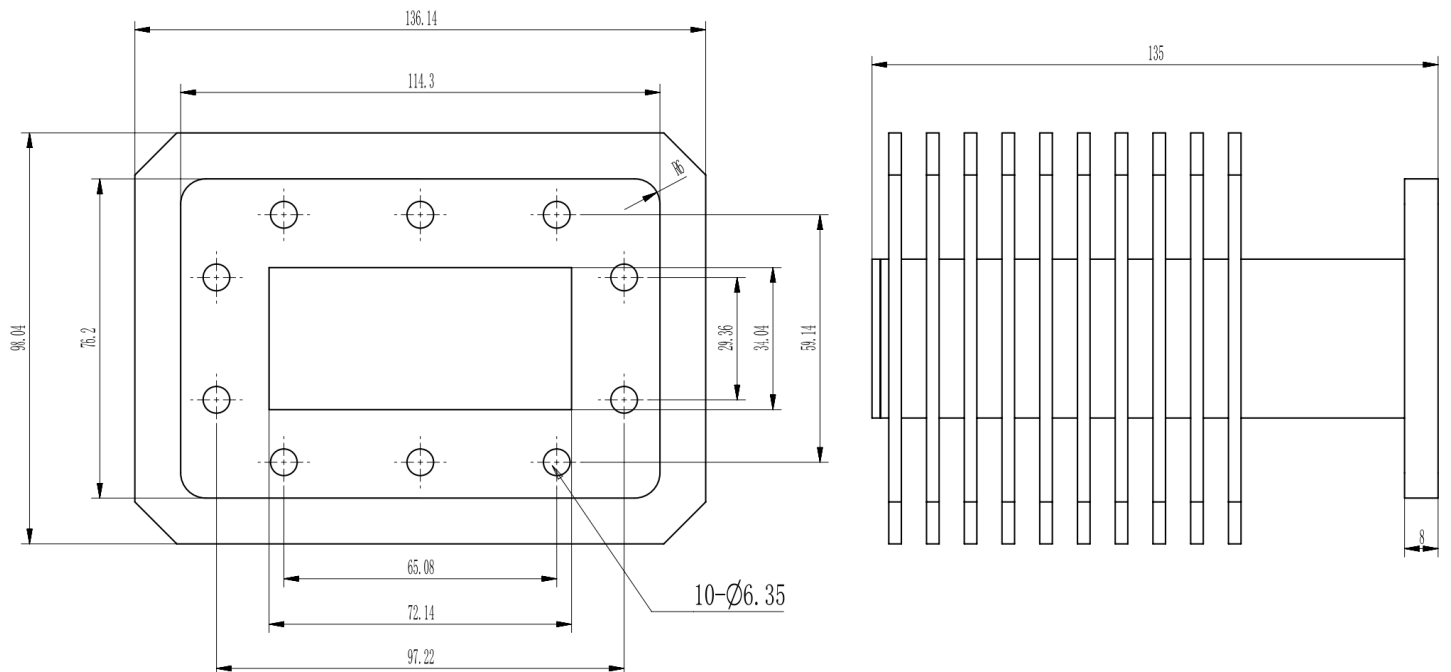



Typical Test Data

