



9900-16100 MHz Band Pass Filter


BPF-13000MS2

RVA 1

Specifications

1	Center Frequency (F0)	13GHz	
2	Pass Band Frequency	9900 ~ 16100 MHz	
3	Pass Band Insertion Loss	≤1.0dB	
4	Pass Band Ripple	≤0.6dB	
5	Pass Band Return Loss	≥18dB	
6	Stop Band Rejection	≥80dB @ DC ~ 8350MHz ≥75dB @ 8350 ~ 8500MHz	≥80dB @ 17000 ~ 26000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	

Dimensions(mm)

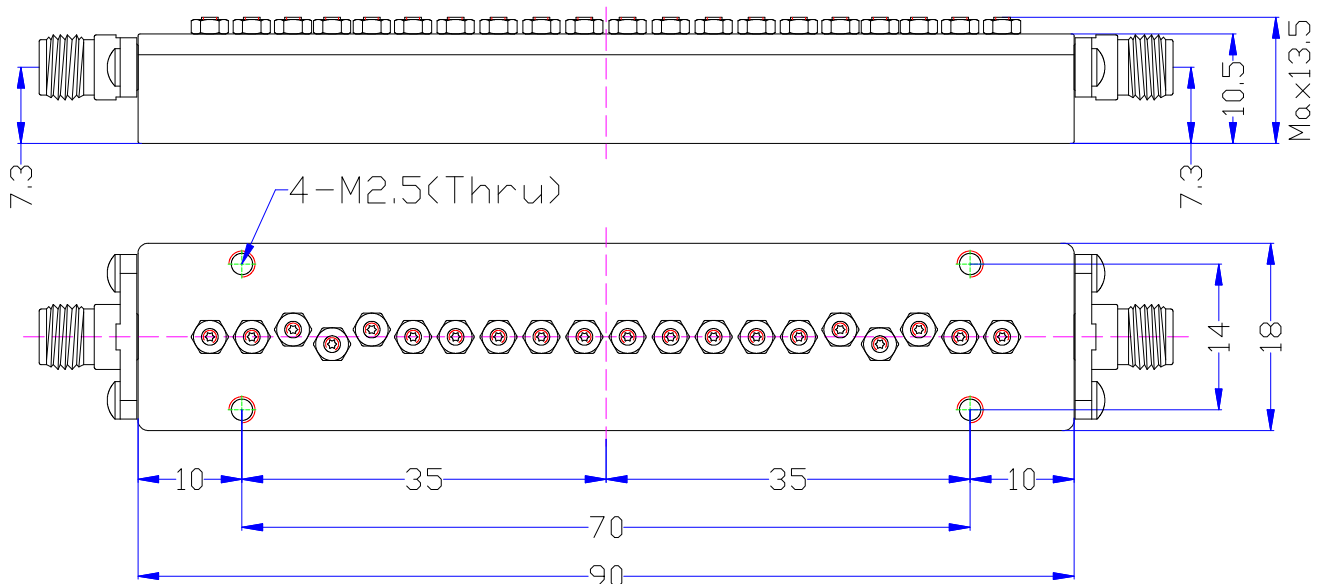



9900-16100 MHz Band Pass Filter

BPF-13000MS2

RVA 1

Typical Test Data

