



703-733 MHz Band Pass Filter


BPF-718MS1

RVA 1

Specifications

1	Center Frequency (F0)	718MHz	
2	Pass Band Frequency	703 ~ 733 MHz	
3	Pass Band Insertion Loss	≤1.0dB	
4	Pass Band Ripple	≤0.4dB	
5	Pass Band VSWR	≤1.22	
6	Stop Band Rejection	≥50dB @ DC ~ 678MHz	≥50dB @ 758 ~ 3000MHz
7	Impedance	50 Ohms	
8	Power Handling	20W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30°C ~ +70°C	
12	Weight	Approx 45g	

Dimensions(mm)

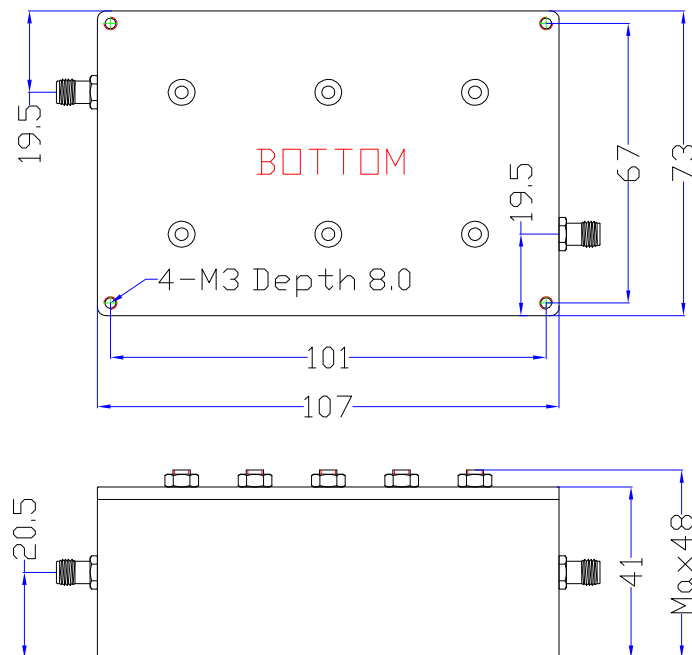



703-733 MHz Band Pass Filter

BPF-718MS1

RVA 1

Typical Test Data

