



Power Divider

2 Way, 0.5-26.5 GHz, SMA, 20 Watts

Rev 1


Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	2 Way
Frequency Range	0.5-26.5 GHz
Insertion Loss	≤ 2.4dB (Excluding theoretical loss 3.0dB)
Input VSWR	1.6 max
Output VSWR	1.6 max
Isolation	16dB min
Amplitude Balance	≤ ±0.4dB
Phase Balance	≤ ±4°
Average Power Rating	20 Watts (As Divider), 1 Watts (As Combiner)
Operating Temperature	-45°C ~ +85°C

Mechanical

Input/Output Connectors	SMA Female
Housing Finishing	Painted Aluminum
Outline Dimensions	149*25*10 (mm)

Dimensions(Unit: mm/[inch], Tolerance: ±0.3mm)

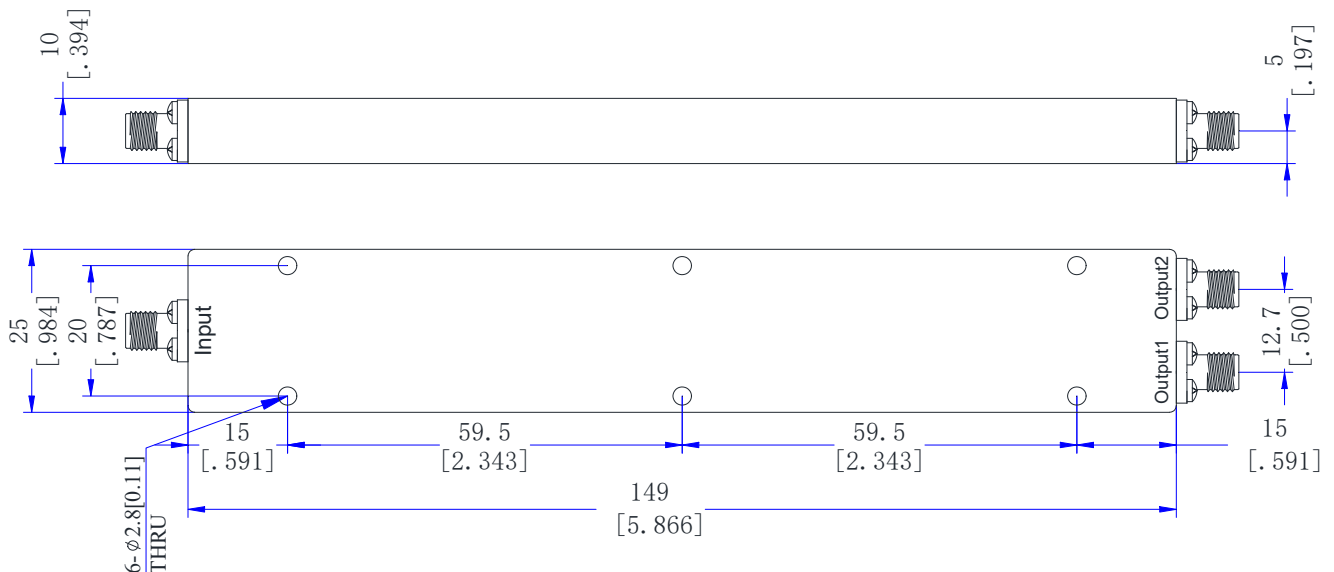



Typical Test Data

