



## Power Divider

4 Way, 2-6 GHz, N Type, 30 Watts

Rev 1


### Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	4 Way
Frequency Range	2-6 GHz
Insertion Loss	≤ 0.8dB (Excluding theoretical loss 6.0dB)
Input VSWR	1.25 max
Output VSWR	1.2 max
Isolation	20dB min
Amplitude Balance	≤ ±0.3dB
Phase Balance	≤ ±3°
Average Power Rating	30 Watts (As Divider), 2 Watts (As Combiner)
Operating Temperature	-35°C ~ +75°C

### Mechanical

Input/Output Connectors	N Female
Housing Finishing	Sandblasting Aluminum with conductive oxidation
Outline Dimensions	49*97*20 (mm)
Weight	Approx 300g

Dimensions(Unit: mm/[inch], Tolerance: ±0.3mm)

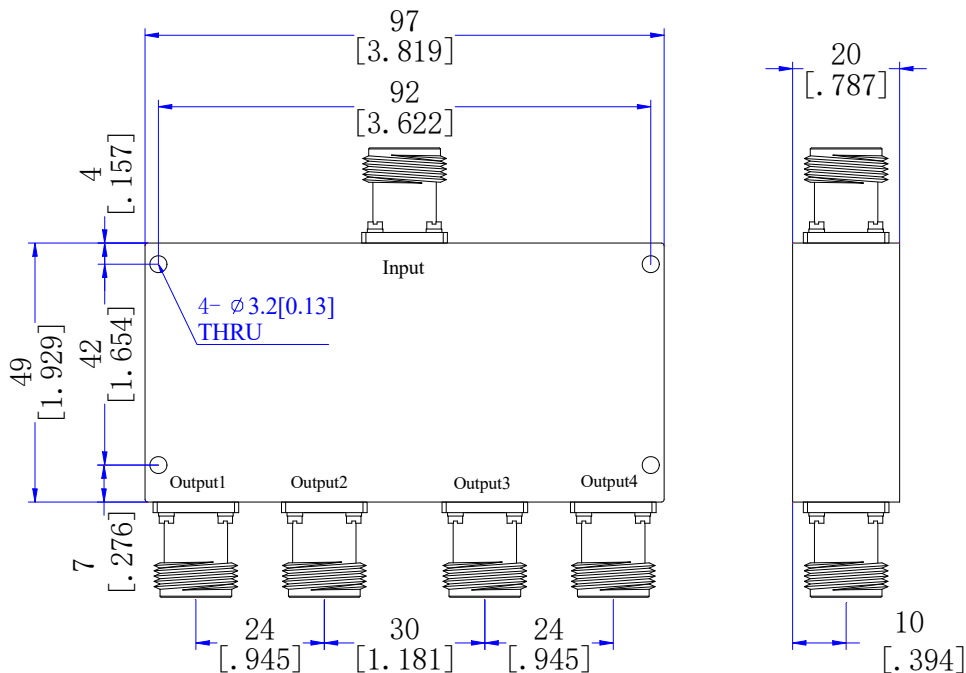

# Power Divider

# PDM-0206-N4

4 Way, 2-6 GHz, N Type, 30 Watts



Rev 1

## Typical Test Data

